

PERFO

Standard Ground Reinforcement Tiles

Technical Specifications

Material:	PE / PP	
Colour:	Black	
Closed surface area (load bearing):	75%	
Surface texture:	raised points for grip	
Load bearing capability:	up to 40 tonnes/m ² *	
	* depending on ground conditions and preparation	
Dimensions (individual tile)**	200 x 200 x 37 mm	405 x 405 x 37 mm
**not including connecting lugs	(single element tile)	(4 element combi-tile)
Weight per tile:	approx. 225 g	approx. 900 g
Dimensions as supplied (made-up section):	a) 121 x 81 cm 6 x 4 Perfo tiles	b) 121 x 121 cm 6 x 6 Perfo tiles
Area per made up section	approx. 0.98 m ²	approx. 1.47 m ²
Weight per made-up section:	5.5 kg	8.1 kg
No. of sections per pallet:	55	55
Total surface area per pallet:	approx. 54 m ²	approx. 81 m ²
Weight per pallet:	approx. 320 kg	approx. 460 kg
Height per pallet:	approx. 220 cm	approx. 220 cm


Resistant to oil, solvents, salt water, most acids.

UV and frost resistant

Does not rot

Deliveries may consist of both single element and 4 element combi-tiles, which are completely compatible with each other. If single element tiles are specifically required, this should be stated at the time of ordering.

Non-perforated white tiles for marking purposes, eg. to demarcate parking bays or for centre-lines are also available on request.

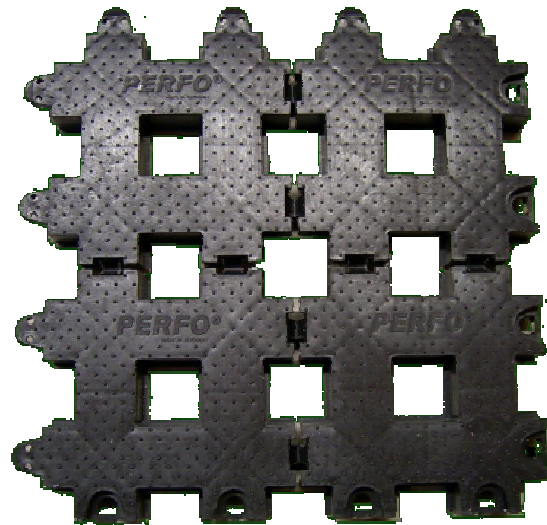

PERFO - S2T Grass Reinforcement

S2T Group
Jan 2010